
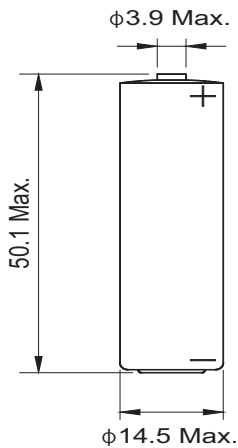


SPECIFICATIONS	
(Typical values stored at 20°C for one year)	
Nominal Capacity	1.7Ah
(at 2mA/85°C/185°F/2.0V Cut-Off)	
Nominal Voltage	3.6V
Maximum Continuous Current	100mA
Maximum Pulse Current	200mA
Operating Temperature Range	-55~150°C
Weight	17.1g
Volume	8.0cm ³
UL Approval	MH28122


DISCHARGE CHARACTERISTICS AT +85°C

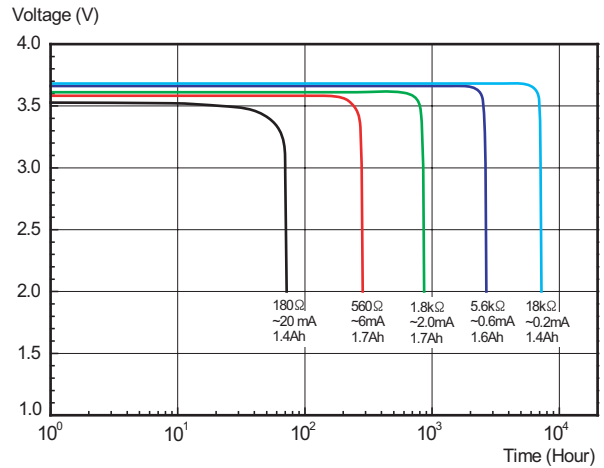

DIMENSIONS IN MM

CAPACITY VS. CURRENT

AVAILABLE CAPACITY

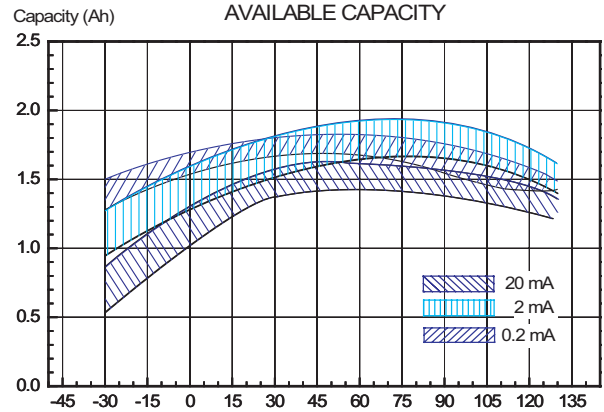

Available Terminal Type :
 STD, T1, T2, T3, T3/R,
 T3EU, T3EU/R, AX, Wire,
 Connector Type

OPERATING VOLTAGE

