


# GP Batteries

## Data Sheet


Model No.: GP210AFHT

Type	: High Temperature Rechargeable Nickel Metal Hydride Cylindrical Cell	
Nominal Dimension (with Sleeve)	: $\Phi = 17.0\text{mm}$ H = 50.0 mm	
Applications	: Recommended discharge current 210mA to 2100mA	
Nominal Voltage	: 1.2V	
Nominal Capacity	: Minimum : 2100 mAh Typical : 2205mAh when discharge at 420mA to 1.0V at 20°C	
Charging Condition	: 210mA for 16 hrs at 20°C	
Service Life	: >350 cycles (IEC 61951-2)	
Continuous Overcharge	: Comply with IEC61951-2 Permanent Charge Endurance Test	
Weight	: 38.0g	
Internal Resistance	: Average 17m $\Omega$ upon fully charged (Range 14-20m $\Omega$ ) at 1000Hz	
Max. Charging Voltage	: 1.5V at 210mA charging	
Ambient Temperature Range	Charging	: 0 to 70°C
	Discharging	: -20 to 70°C
	Storage	: -20 to 35°C
	Storage (1 week)	: -20 to 60 °C



Low Rate Discharge

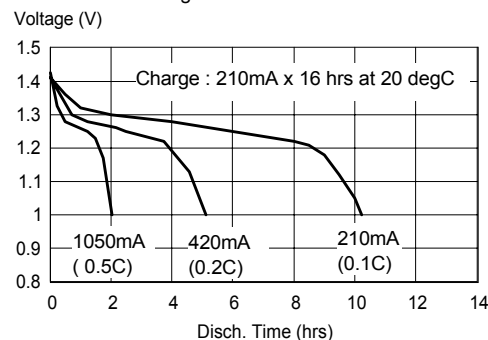

High Rate Discharge

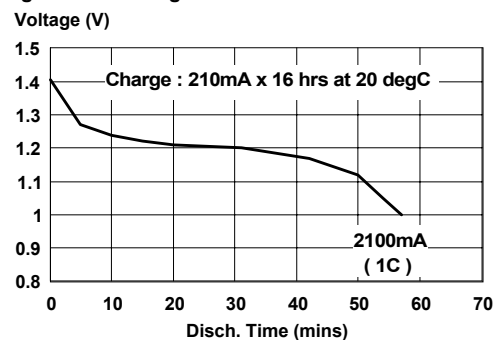

Charge / discharge efficiency vs. temp.

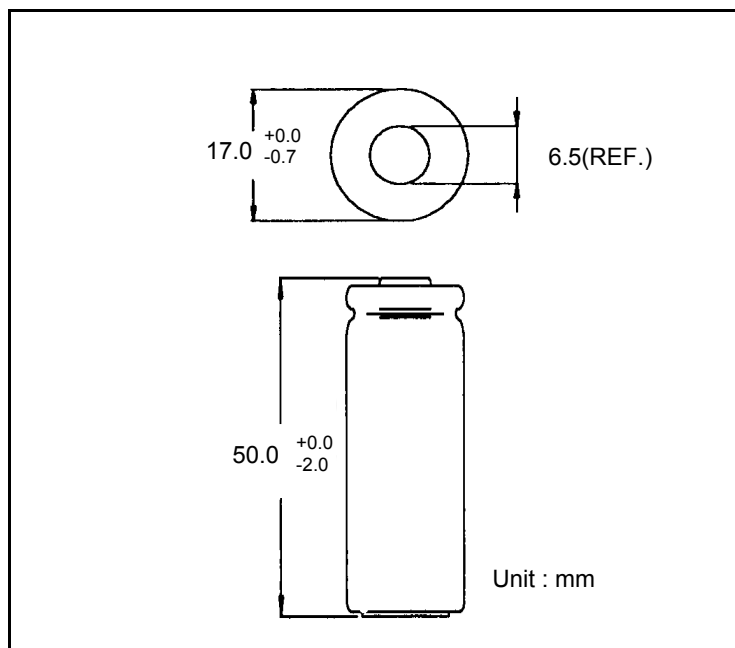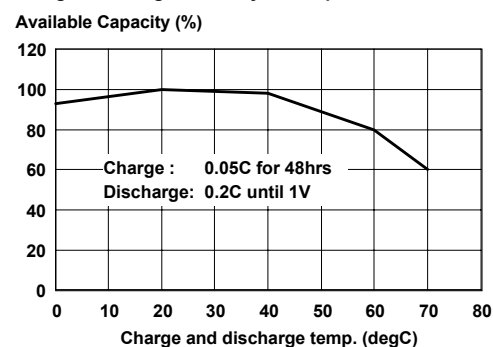

\* The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.