


# SANYO

## Cadnica

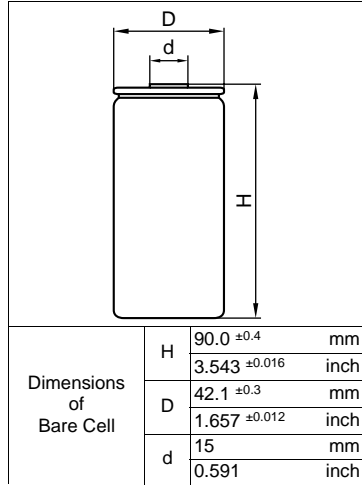


## Cell Type KR-MH Specifications


Nominal Capacity		10000mAh
Nominal Voltage		1.2V
Charging Current	Trickle	333mA
	Standard	1000mA
Charging Time	Trickle	above 48Hrs.
	Standard	14 to 16Hrs.
Ambient Temperature	Charge	0°C to +70°C [+32°F to 158°F]
	Discharge	-20°C to +70°C [-4°F to 158°F]
	Storage	-30°C to +70°C [-22°F to 158°F]
Internal Impedance (Av.) (at 50% discharge)		2.6mΩ (at 1000Hz)
Weight		395g/13.93oz
Dimensions(D)×(H) (with tube)		43.1 <sup>0</sup> <sub>-1</sub> × 91.0 <sup>0</sup> <sub>-1.4</sub> mm 1.70 <sup>0</sup> <sub>-0.04</sub> × 3.58 <sup>0</sup> <sub>-0.06</sub> inch

### Typical Characteristics


Charge

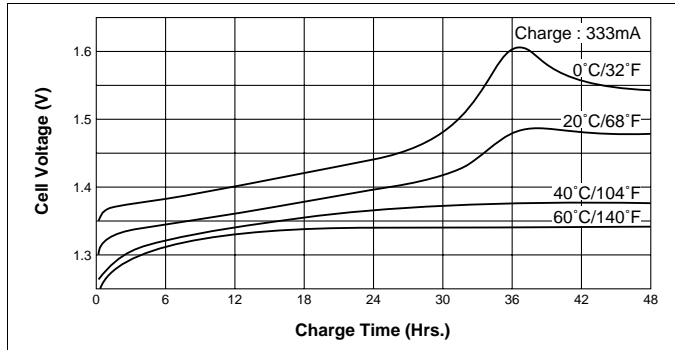


Discharge (at high rate)

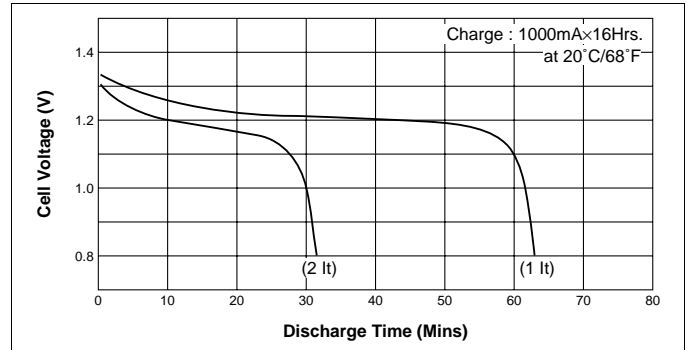


Charge

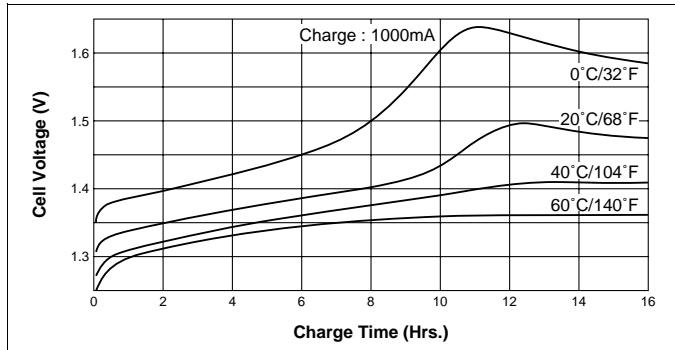

Discharge Trickle charge (at high temperature)

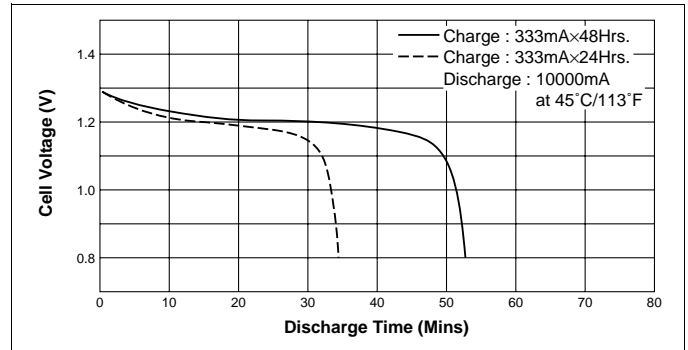

Discharge (at low rate)

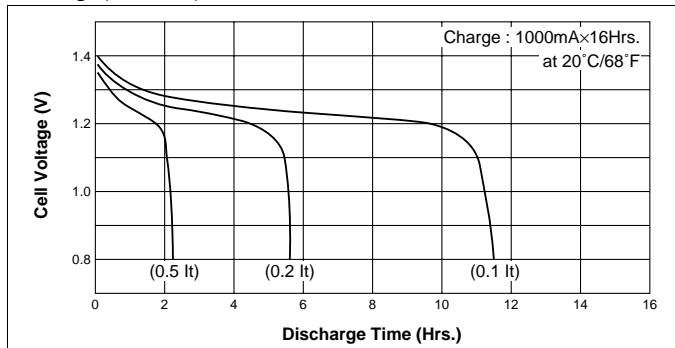

Temperature (Charge & Discharge)

