

**LITHIUM BROMINE CHLORIDE CELL**

**Technical Overview**

Open Circuit Voltage (25°C)	3.9 V
Rated Discharge Current	1 mA
Rated Capacity	1 Ah
Maximum Continuous Current	10 mA
Cell Diameter	25.4 mm (1.00 in.)
Cell Length	7.62 mm (0.30 in.)
Cell Weight	13 g
Lithium Weight	0.4 g
Self Discharge	3% per year at 25°C
Operating Temperature	-55°C to +85°C
	-67°F to +185°F

NOTE: This product and its external electrical contact materials are RoHS compliant. See our "RoHS Statement" for more information.

**Key Features:**


- Primary chemistry (non-rechargeable)
- Low rate capability
- Bobbin style construction
- Stainless steel container
- Hermetic glass-to-metal sealing
- Wide operating temperature range as low as -55°C and up to +85°C
- Low self discharge rate (3% per year at 25°)
- Custom terminations available

**Main Applications:**


- Memory back-up
- Animal telemetry
- Low current downhole oil and gas

NOTE: This list does not include all potential applications, please consult Electrochem for your specific application needs.

**Dimensions**

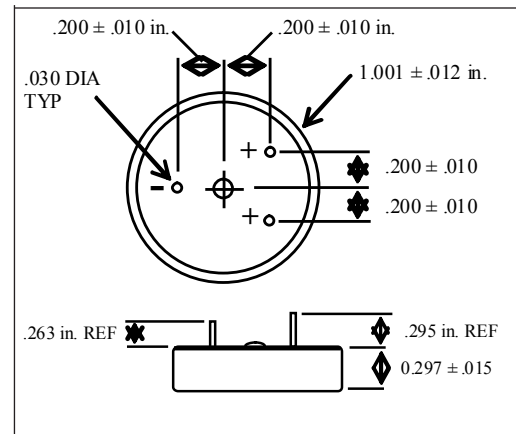

**25°C discharge**

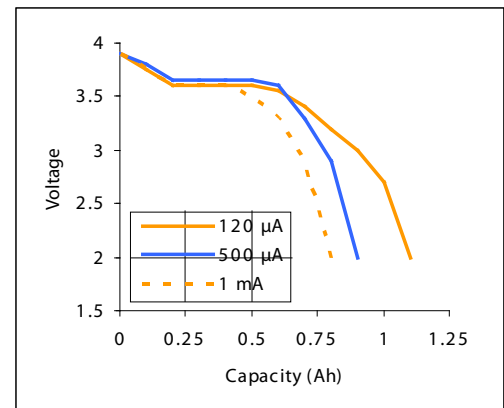

NOTICE: The information on this datasheet is for single cells only. Please consult with Electrochem if you are interested in additional information. The information in this document is subject to change without notice and does not constitute a warranty of performance.



A subsidiary of Greatbatch Ltd.

10000 Wehrle Drive, Clarence, NY 14031 • Tel 716.759.5800 • Fax 716.759.2562  
Sales@ElectrochemSolutions.com • www.ElectrochemSolutions.com

Rev. 0000

