


Data Sheet

Type Number:	55715	
Sytem:	Nickel Metal Hydride/ KOH Electrolyte	
Nominal Voltage [V]:	1.2	
Nominal Capacity C [mAh]:	140	
Typical Capacity C [mAh]:	150	
	at 28 mA / 1.00 V	
Weight, approx. [g]	6	
Dimensions [mm]:	min.	max.
Length [l]:	13.9	14.1
Width Facing [w]:	25.4	25.6
Height [h]:	5.6	5.85

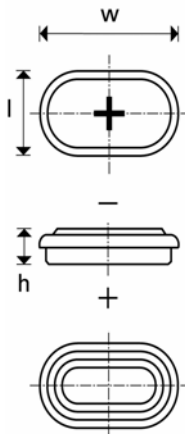

UL Recognition:	MH13654	
Coding:	Manufacturing 5 digit code (123 = day/4 = year/ 5 = version)	
Temperature Ranges [°C]	min.	max.
Storage: less than 30 days	-40	85
Discharge:	-20	85
Charge:	0	85
Charging Method:		
Normal Charging:	14 mA for 14 – 16 h	
Accelerated Charging:	28 mA for 7-8 h	
Fast Charging:	70 mA for 2.5h	
	Time controlled, voltage control recommended	
Trickle Charging:	4.2 mA	
Overcharge (20°C):	14 mA continuous 28 mA up to 1 year	
Charge Retention [%] at 20°C:	90 Capacity available after 1 month Storage at 20°C	
Internal Resistance [Ohm]:	0.8 at charged cells, 20°C, DC: 0.2 CA/2 CA, (IEC 61951-2)	
Impedance [Ohm]:	0.13 at charged cells, 20°C, AC: 1kHz, (IEC 61951-2)	
Typical Capacities [mAh]:	at 140 mA / 0.9V 88	
Max. Discharge Current (cont.) [mA]:	280	
Life Expectancy (typical):		
IEC Cycle:	1000 Cycles	
Trickle Charge:	up to 6 years (20°C) up to 3 years (45°C)	

Capacities based on normal charging