


**Data Sheet**

<b>Type Number:</b>	55850	
<b>Sytem:</b>	Nickel Metal Hydride/ KOH Electrolyte	
<b>Nominal Voltage [V]:</b>	1.2	
<b>Nominal Capacity C [mAh]:</b>	500	
<b>Typical Capacity C [mAh]:</b>	510	
	at 100 mA / 1.00 V	
<b>Weight, approx. [g]</b>	14.0	
<b>Dimensions [mm]:</b>	<b>min.</b>	<b>max.</b>
<b>Length [l]:</b>	23.9	24.1
<b>Width Facing [w]:</b>	33.9	34.1
<b>Height [h]:</b>	6.1	6.6
<b>UL Recognition:</b>	MH 13654 (N)	
<b>Coding:</b>	Manufacturing 5 digit code (123 = day/4 = year/ 5 = version)	
<b>Temperature Ranges [°C]</b>	<b>min.</b>	<b>max.</b>
<b>Storage:</b> less than 30 days	-40	65
<b>Discharge:</b>	-20	65
<b>Charge:</b>	0	65
<b>Charging Method:</b>		
<b>Normal Charging:</b>	50 mA for 14 – 16 h	
<b>Accelerated Charging (20°C):</b>	150 mA for 4 h	
	Time controlled, voltage control recommended	
<b>Fast Charging (20°C):</b>	500 mA for h *	
<b>Trickle Charging:</b>	5 mA	
<b>Overcharge (20°C):</b>	15 mA up to 12 months	
	50 mA up to 6 months	
<b>Charge Retention [%] at 20°C:</b>	80	
	Capacity available after 1 month Storage at 20°C	
<b>Internal Resistance [Ohm]:</b>	0.1	
	at charged cells, 20°C, DC: 0.2 CA/2 CA, (IEC 61951-2)	
<b>Impedance [Ohm]:</b>	0.015	
	at charged cells, 20°C, AC: 1kHz, (IEC 61951-2)	
<b>Typical Capacities [mAh]:</b>		
at 500 mA / 0.9 V	470	
at 1.50 A / 0.9 V	420	
<b>Max. Discharge Current (cont.) [mA]:</b>	3000	
<b>Life Expectancy (typical):</b>		
<b>IEC Cycle:</b>	1000 Cycles (IEC 61951-2)	
<b>Trickle Charge:</b>	up to 5 years (20°C)	
<b>Trickle Charge:</b>	up to 3 years (45°C)	

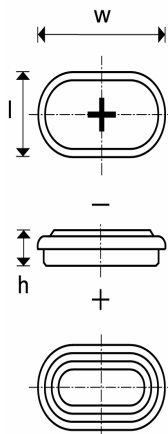

\* (-dv=5-10 mV/ cell; dT/ dt=0.7°C/min)

Capacities based on normal charging